

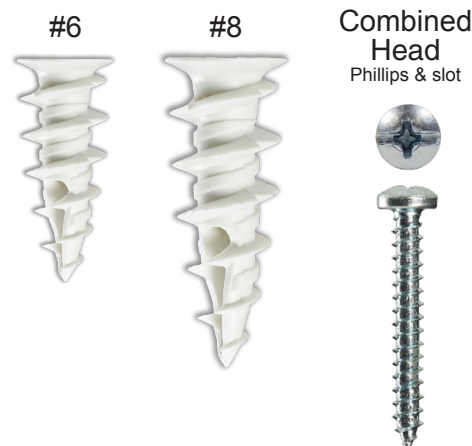


SPECIFICATIONS, LISTINGS AND APPROVALS
Body Material: Nylon

Screw Material: Carbon Steel AISI-1018 with Zinc plating ASTM B633 Type III

Available Sizes: For #6 and #8 screws (3,5 mm & 4 mm)

KEY FEATURES & BENEFITS

- ▶ Fast and easy to install
- ▶ No pre-drilling, the only tool required is a screwdriver
- ▶ Designed to install smoothly and easily through drywall
- ▶ Can easily be removed and reinstalled

MATERIALS


ANCHOR PARAMETERS *		SAFE WORKING LOADS 2:1 **					
		DRYWALL 3/8" (10 mm)		DRYWALL 1/2" (13 mm)		DRYWALL 5/8" (16 mm)	
ANCHOR SIZE & MATERIAL	SCREW SIZE	TENSION	SHEAR	TENSION	SHEAR	TENSION	SHEAR
#6 Nylon + Screws	#6 x 7/8" (3,5 mm x 22 mm)	20 lb (9 kg)	46 lb (21 kg)	23 lb (10 kg)	52 lb (24 kg)	30 lb (14 kg)	55 lb (25 kg)
#8 Nylon + Screws	#8 x 1-1/4" (4 mm x 32 mm)	23 lb (10 kg)	50 lb (23 kg)	25 lb (11 kg)	63 lb (29 kg)	38 lb (17 kg)	83 lb (38 kg)

WALLDRILLER MEASUREMENTS	SIZE	DIAMETER	LENGTH
	#6 (for screw 3,5 mm)	0.4" (10 mm)	1" (25 mm)
	#8 (for screw 4 mm)	0.6" (15 mm)	1.5" (38 mm)

INSTALLATION INSTRUCTIONS

- Using a screwdriver, push the tip of the WallDriller® into the drywall in a screwing motion.
- Turn clockwise until flush with surface and firmly in place. (Do not overtorque)
- Insert the screw through the object you need to affix and turn clockwise until firmly in place.

CAUTION : Always wear safety glasses.

NOTES:

- Technical data is provided for a proper use of the anchor
- Safe working loads represent a safety factor of 2:1 from ultimate test loads.
- Not recommended for ceiling applications.
- Loads may vary according to the quality of the drywall.

TOOLS REQUIRED

 * For a complete list of the different packaging formats available please visit our website cobraanchors.com

** Loads may vary according to the quality of the drywall.